

PAR 56 - Swimming pool LED PAR56 LED WHITE 0060541



Product features

 PAR56 LED swimming pool lamps. High power up to 2000lm and RGB version. Optional Sylvania remote control and receiver available.











PRODUCT OVERVIEW

IPC Code	0060541
Product name	PAR56 LED WHITE
Technology	LED
Туре	PAR 56
Cap/Base	Screw Terminal
Fixture rating	Enclosed
Environment	External
General application	Hospitality, Retail, Residential & Consumer
Certifications	00
ETIM Class	EC001959
E-number SE	8290021
Luminous flux (lm)	1000
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	71
LOR (%)	100
Colour temperature (K)	6000
Light colour	6000 Daylight
Beam Angle (°)	40
Wattage (W)	14
Total power consumption (W)	14
Control gear type	Halogen transformer
Average life (Nominal) (h)	25000
IP rating	IP68
Product EAN number	5410288605418

DATA TABLE

General data	
IPC Code	0060541
Product name	PAR56 LED WHITE
Technology	LED
Туре	PAR 56
Cap/Base	Screw Terminal
Fixture rating	Enclosed



PAR 56 - Swimming pool LED PAR 56 LED WHITE 0060541

Environment External Ceneral application	Environment	External
Operating Temperature Range (°C) -10°C to +55°C Certifications 00 ETIM Class EC001959 E-number SE 8290021 Optical data		
Certifications 00 ETIM Class EC001959 E-number SE 8290021 Optical data		· · · ·
ETIM Class E-number SE 8290021 Optical data Luminous flux (Im) Rated lamp efficacy 100h 50Hz at 35°C (Im/W) LOR (%) Colour temperature (K) 6000 Correlated colour temperature range (K) Light colour Adjustable chromaticity N Beam Angle (*) Electrical data Wattage (W) 14 Total power consumption (W) Mains voltage (V) Control gear type Halogen transformer Transformer required Prive current (mA) Lifetime data Average life (Nominal) (h) 25000 Average life (Rated) (h) Physical data IP rating Nominal Product Width (mm) Nominal Product Width (mm) Nominal Product Width (mm) Packaging Single packaging type Packaging single length / height (cm) Packaging single length / height (cm) Packaging outer width (cm) Packaging outer length / height (cm) Packaging outer width (cm)		
E-number SE 8290021		
Optical data Luminous flux (Im) 1000 Rated lamp efficacy 100h 50Hz at 35°C (Im/W) 100 Colour temperature (K) 6000 Correlated colour temperature range (K) 6000 Light colour 6000 Daylight Adjustable chromaticity N Beam Angle (*) 40 Electrical data Wattage (W) 14 Total power consumption (W) 14 Mains voltage (V) 12V Control gear type Halogen transformer Transformer required Yes Drive current (mA) 1944 Lamp Energy Label (class) A Lifetime data Average life (Nominal) (h) 25000 Average life (Rated) (h) 25000 Physical data IP rating IP68 Nominal Product Width (mm) 105 Max. Lamp Dlameter (mm) - D 175 Weight (kg) 0.519 Recessed Depth (mm) 10 Packaging Single packaging type Carton Product EAN number 5410288605418 Packaging single length / height (cm) 15.1 Packaging outer length / height (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer width (cm) 31.5		
Luminous flux (im) Rated lamp efficacy 100h 50Hz at 35°C (im/W) LOR (%) Colour temperature (K) Correlated colour temperature range (K) Given (Ministry) Ream Angle (*) Electrical data Wattage (W) Flux (Ministry) Mains voltage (V) Control gear type Halogen transformer Transformer required Prive current (mA) Lamp Energy Label (class) A Lifetime data Average life (Nominal) (h) Average life (Rated) (h) Physical data IP rating Nominal Product Width (mm) Max. Lamp Diameter (mm) - D Reckaging Single packaging type Packaging single length / height (cm) Packaging single width (cm) Packaging outer width (cm) Packaging view width (cm) Packaging view width (cm) Packaging view width (cm) Packaging outer width (cm) Packaging view width (cm) Packag	E number de	0200021
Luminous flux (im) Rated lamp efficacy 100h 50Hz at 35°C (im/W) LOR (%) Colour temperature (K) Correlated colour temperature range (K) 6000 Light colour Adjustable chromaticity Ream Angle (*) Release (*) Releas	Optical data	
Rated lamp efficacy 100h 50Hz at 35°C (Im(W) 71 LOR (%) 100 Colour temperature (K) 6000 Correlated colour temperature range (K) 6000 Daylight Light colour 6000 Daylight Adjustable chromaticity N Beam Angle (*) 40 Electrical data *** Wattage (W) 14 Total power consumption (W) 14 Mains voltage (V) 12V Control gear type Halogen transformer Transformer required Yes Drive current (mA) 1944 Lamp Energy Label (class) A Average life (Nominal) (h) 25000 Average life (Rated) (h) 25000 Physical data ** IP rating IP68 Nominal Product Width (mm) 105 Max. Lamp Diameter (mm) - D 175 Weight (kg) 0.519 Recessed Depth (mm) 10 Packaging 5410288605418 Packaging single length / height (cm) 15.0 Packaging singl		1000
(Im/W) LOR (%) 100 Colour temperature (K) 6000 Correlated colour temperature range (K) 6000 Light colour 60000 Daylight Adjustable chromaticity N Beam Angle (*) 40 Electrical data *** Wattage (W) 14 Total power consumption (W) 14 Mains voltage (V) 12V Control gear type Halogen transformer Transformer required Yes Drive current (mA) 1944 Lamp Energy Label (class) A Lifetime data ** Average life (Nominal) (h) 25000 Average life (Rated) (h) 25000 Physical data ** IP rating IP68 Nominal Product Width (mm) 105 Max. Lamp Diameter (mm) - D 175 Weight (kg) 0.519 Recessed Depth (mm) 10 Packaging single length / height (cm) 15.0 Packaging single length / height (cm) 15.1 Packaging s	, ,	
LOR (%)		71
Correlated colour temperature range (K) 6000		100
Light colour 6000 Daylight Adjustable chromaticity N Beam Angle (°) 40 Electrical data Wattage (W) 14 Total power consumption (W) 14 Mains voltage (V) 12V Control gear type Halogen transformer Transformer required Yes Drive current (mA) 1944 Lamp Energy Label (class) A Lifetime data A Average life (Nominal) (h) 25000 Average life (Rated) (h) 25000 Physical data IP rating Nominal Product Width (mm) 105 Max. Lamp Diameter (mm) - D 175 Weight (kg) 0.519 Recessed Depth (mm) 10 Packaging Single packaging type Carton Product EAN number 5410288605418 Packaging single length / height (cm) 15.1 Packaging single eight (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer l	Colour temperature (K)	6000
Adjustable chromaticity Beam Angle (*) Electrical data Wattage (W) Total power consumption (W) Mains voltage (V) Control gear type Halogen transformer Transformer required Pres Drive current (mA) Lamp Energy Label (class) A Lifetime data Average life (Nominal) (h) Average life (Rated) (h) Physical data IP rating Nominal Product Width (mm) Max. Lamp Diameter (mm) - D Ty5 Weight (kg) Recessed Depth (mm) 10 Packaging Single packaging type Product EAN number Packaging single length / height (cm) Packaging single width (cm) Packaging outer length / height (cm) Packaging outer length / height (cm) Packaging outer length / height (cm) Packaging outer width (cm) Packaging outer width (cm) Packaging outer width (cm) Packaging outer length / height (cm) Packaging outer width (cm) Packaging outer length / height (cm) Packaging outer width (cm) 31.5	Correlated colour temperature range (K)	6000
Beam Angle (°)	Light colour	6000 Daylight
Electrical data Wattage (W) 14 Total power consumption (W) 14 Mains voltage (Y) 12V Control gear type Halogen transformer Transformer required Yes Drive current (mA) 1944 Lamp Energy Label (class) A Lifetime data Average life (Nominal) (h) 25000 Average life (Rated) (h) 25000 Physical data IP rating IP68 Nominal Product Width (mm) 105 Max. Lamp Diameter (mm) - D 175 Weight (kg) 0.519 Recessed Depth (mm) 10 Packaging Single packaging type Carton Product EAN number 5410288605418 Packaging single length / height (cm) 15.0 Packaging single length / height (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Packaging outer length / height (cm) 46.5 Packaging outer length / height (cm) 31.5	Adjustable chromaticity	N
Wattage (W) 14 Total power consumption (W) 14 Mains voltage (V) 12V Control gear type Halogen transformer Transformer required Yes Drive current (mA) 1944 Lamp Energy Label (class) A Lifetime data Average life (Nominal) (h) 25000 Average life (Rated) (h) 25000 Physical data IP rating IP68 Nominal Product Width (mm) 105 Max. Lamp Diameter (mm) - D 175 Weight (kg) 0.519 Recessed Depth (mm) 10 Packaging Single packaging type Carton Product EAN number 5410288605418 Packaging single length / height (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer length / height (cm) 31.5	Beam Angle (°)	40
Wattage (W) 14 Total power consumption (W) 14 Mains voltage (V) 12V Control gear type Halogen transformer Transformer required Yes Drive current (mA) 1944 Lamp Energy Label (class) A Lifetime data Average life (Nominal) (h) 25000 Average life (Rated) (h) 25000 Physical data IP rating IP68 Nominal Product Width (mm) 105 Max. Lamp Diameter (mm) - D 175 Weight (kg) 0.519 Recessed Depth (mm) 10 Packaging Single packaging type Carton Product EAN number 5410288605418 Packaging single length / height (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer length / height (cm) 31.5		
Total power consumption (W) Mains voltage (V) Control gear type Transformer required Pes Drive current (mA) Lifetime data Average life (Nominal) (h) Average life (Rated) (h) Physical data IP rating Nominal Product Width (mm) Max. Lamp Diameter (mm) - D Weight (kg) Recessed Depth (mm) Packaging Single packaging type Product EAN number Packaging single length / height (cm) Packaging outer width (cm) Packaging outer width (cm) Packaging outer length / height (cm) Packaging outer width (cm)	Electrical data	
Mains voltage (V) 12V Control gear type Halogen transformer Transformer required Yes Drive current (mA) 1944 Lamp Energy Label (class) A Lifetime data Average life (Nominal) (h) 25000 Average life (Rated) (h) 25000 Physical data IP rating IP68 Nominal Product Width (mm) 105 Max. Lamp Diameter (mm) - D 175 Weight (kg) 0.519 Recessed Depth (mm) 10 Packaging Single packaging type Carton Product EAN number 5410288605418 Packaging single length / height (cm) 15.0 Packaging single depth (cm) 15.1 Packaging outer length / height (cm) 46.5 Packaging outer length / height (cm) 31.5	Wattage (W)	14
Control gear type Halogen transformer Transformer required Yes Drive current (mA) 1944 Lamp Energy Label (class) A Lifetime data Average life (Nominal) (h) 25000 Average life (Rated) (h) 25000 Physical data IP rating IP68 Nominal Product Width (mm) 105 Max. Lamp Diameter (mm) - D 175 Weight (kg) 0.519 Recessed Depth (mm) 10 Packaging Single packaging type Carton Product EAN number 5410288605418 Packaging single length / height (cm) 15.0 Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer length / height (cm) 46.5 Packaging outer width (cm) 31.5	Total power consumption (W)	14
Transformer required Yes Drive current (mA) 1944 Lamp Energy Label (class) A Lifetime data Average life (Nominal) (h) 25000 Average life (Rated) (h) 25000 Physical data IP rating IP68 Nominal Product Width (mm) 105 Max. Lamp Diameter (mm) - D 175 Weight (kg) 0.519 Recessed Depth (mm) 10 Packaging Single packaging type Carton Product EAN number 5410288605418 Packaging single length / height (cm) 15.1 Packaging single width (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer length / height (cm) 31.5	Mains voltage (V)	12V
Drive current (mA) 1944 Lamp Energy Label (class) A Lifetime data Average life (Nominal) (h) 25000 Average life (Rated) (h) 25000 Physical data IP rating IP68 Nominal Product Width (mm) 105 Max. Lamp Diameter (mm) - D 175 Weight (kg) 0.519 Recessed Depth (mm) 10 Packaging Single packaging type Carton Product EAN number 5410288605418 Packaging single length / height (cm) 15.0 Packaging single depth (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer width (cm) 31.5	Control gear type	Halogen transformer
Lifetime data Average life (Nominal) (h) 25000 Average life (Rated) (h) 25000 Physical data IP rating IP68 Nominal Product Width (mm) 105 Max. Lamp Diameter (mm) - D 175 Weight (kg) 0.519 Recessed Depth (mm) 10 Packaging Single packaging type Carton Product EAN number 5410288605418 Packaging single length / height (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer length / height (cm) 31.5	-	
Lifetime data Average life (Nominal) (h) 25000 Average life (Rated) (h) 25000 Physical data IP rating IP68 Nominal Product Width (mm) 105 Max. Lamp Diameter (mm) - D 175 Weight (kg) 0.519 Recessed Depth (mm) 10 Packaging Single packaging type Carton Product EAN number 5410288605418 Packaging single length / height (cm) 15.0 Packaging single depth (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer length / height (cm) 31.5		1944
Average life (Nominal) (h) 25000 Physical data IP rating IP68 Nominal Product Width (mm) 105 Max. Lamp Diameter (mm) - D 175 Weight (kg) 0.519 Recessed Depth (mm) 10 Packaging Single packaging type Carton Product EAN number 5410288605418 Packaging single length / height (cm) 15.0 Packaging single width (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer width (cm) 31.5	Lamp Energy Label (class)	A
Average life (Nominal) (h) 25000 Physical data IP rating IP68 Nominal Product Width (mm) 105 Max. Lamp Diameter (mm) - D 175 Weight (kg) 0.519 Recessed Depth (mm) 10 Packaging Single packaging type Carton Product EAN number 5410288605418 Packaging single length / height (cm) 15.0 Packaging single width (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer width (cm) 31.5	Lifetime data	
Average life (Rated) (h) Physical data IP rating Nominal Product Width (mm) Max. Lamp Diameter (mm) - D Weight (kg) Recessed Depth (mm) 10 Packaging Single packaging type Product EAN number Packaging single length / height (cm) Packaging single width (cm) Packaging single depth (cm) 15.1 Packaging single depth (cm) DUN14 (outer) Units per outer package Packaging outer length / height (cm) Packaging outer width (cm) 46.5 Packaging outer width (cm) 31.5		25000
Physical data IP rating IP68 Nominal Product Width (mm) 105 Max. Lamp Diameter (mm) - D 175 Weight (kg) 0.519 Recessed Depth (mm) 10 Packaging Single packaging type Carton Product EAN number 5410288605418 Packaging single length / height (cm) 15.0 Packaging single width (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer width (cm) 31.5	. , , , ,	
IP rating Nominal Product Width (mm) 105 Max. Lamp Diameter (mm) - D 175 Weight (kg) Recessed Depth (mm) 10 Packaging Single packaging type Carton Product EAN number Product EAN number Packaging single length / height (cm) Packaging single width (cm) 15.0 Packaging single depth (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) Units per outer package Packaging outer length / height (cm) Packaging outer width (cm) 31.5	Average life (Nateu) (II)	25000
IP rating Nominal Product Width (mm) 105 Max. Lamp Diameter (mm) - D 175 Weight (kg) Recessed Depth (mm) 10 Packaging Single packaging type Carton Product EAN number Product EAN number Packaging single length / height (cm) Packaging single width (cm) 15.0 Packaging single depth (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) Units per outer package Packaging outer length / height (cm) Packaging outer width (cm) 31.5	Physical data	
Nominal Product Width (mm) 105 Max. Lamp Diameter (mm) - D 175 Weight (kg) 0.519 Recessed Depth (mm) 10 Packaging Single packaging type Carton Product EAN number 5410288605418 Packaging single length / height (cm) 15.0 Packaging single width (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer width (cm) 31.5	•	IP68
Max. Lamp Diameter (mm) - D Weight (kg) Recessed Depth (mm) Packaging Single packaging type Product EAN number Packaging single length / height (cm) Packaging single width (cm) Packaging single depth (cm) DUN14 (outer) Units per outer package Packaging outer length / height (cm) Packaging outer width (cm) 15.1 Packaging single depth (cm) 15.410288605415 Units per outer package Packaging outer length / height (cm) 46.5 Packaging outer width (cm) 31.5		
Weight (kg) 0.519 Recessed Depth (mm) 10 Packaging Single packaging type Carton Product EAN number 5410288605418 Packaging single length / height (cm) 15.0 Packaging single width (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer width (cm) 31.5	· ·	
Recessed Depth (mm) 10 Packaging Single packaging type Carton Product EAN number 5410288605418 Packaging single length / height (cm) 15.0 Packaging single width (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer width (cm) 31.5		
Packaging Single packaging type Carton Product EAN number 5410288605418 Packaging single length / height (cm) 15.0 Packaging single width (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer width (cm) 31.5		10
Single packaging type Product EAN number 5410288605418 Packaging single length / height (cm) Packaging single width (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package Packaging outer length / height (cm) 46.5 Packaging outer width (cm) 31.5		
Product EAN number 5410288605418 Packaging single length / height (cm) 15.0 Packaging single width (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer width (cm) 31.5	Packaging	
Packaging single length / height (cm) 15.0 Packaging single width (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer width (cm) 31.5	Single packaging type	Carton
Packaging single width (cm) 15.1 Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer width (cm) 31.5	Product EAN number	5410288605418
Packaging single depth (cm) 16.2 DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer width (cm) 31.5		15.0
DUN14 (outer) 15410288605415 Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer width (cm) 31.5		
Units per outer package 6 Packaging outer length / height (cm) 46.5 Packaging outer width (cm) 31.5		
Packaging outer length / height (cm) 46.5 Packaging outer width (cm) 31.5		
Packaging outer width (cm) 31.5		
· ·		
Packaging outer depth (cm) 17.3		
	Packaging outer depth (cm)	1/.3





PAR 56 - Swimming pool LED PAR56 LED WHITE 0060541

Safety data


Special purpose lamp	Yes
Intended purpose	For underwater use only.
Suitable for household illumination	No
Safety message	Not suitable for household

PHOTOMETRY





TECHNICAL DRAWINGS

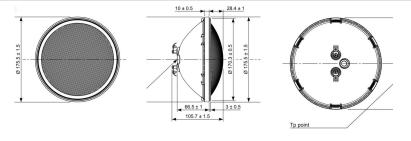



PAR 56 - Swimming pool LED PAR56 LED WHITE 0060541

